

LMU 209

Load Monitoring Unit

FEATURES

- Signal-conditioning of strain gauge sensors
- Very large zero-adjusting range
- Universal input ranges from 0.5 mV/V to 4 mV/V
- Two calibrated outputs: voltage and current
- Selectable bridge supply voltage
- Polycarbonate housing for mounting on DIN-rails or aluminum housing available for harshes applications
- Frequency Response from 0 Hz to 3 kHz (-3 dB)

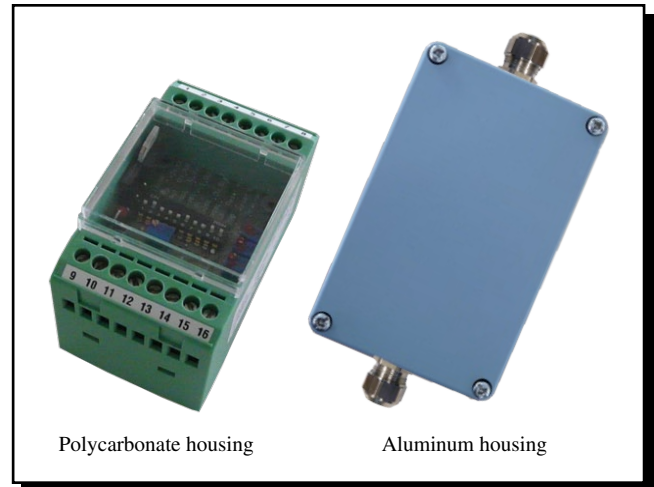


DESCRIPTION

The LMU 209 is a versatile strain gauge amplifier, designed for signal conditioning and interfacing low level signals to programmable logic controllers (PLCs) or any control unit with analog inputs. The LMU 209 features both voltage and current-type outputs with life zero. Due to its integrated DIP-switches, the amplifier can be easily configured to the desired input ranges.

This modularized amplifier is ready for snap-on mounting to DIN-rails. All wires are connected to screw terminals.

SYSTEM CONFIGURATION

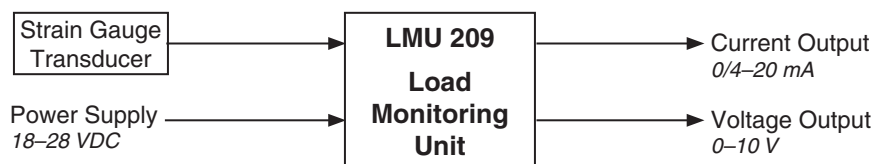


The LMU 209 is used with Magtrol Load Measuring Transducers which measure load and force and provide overload protection. Magtrol also offers a wide range of Load-Force-Weight Transducers in various executions and accuracy classes. Our Digital Process Monitors/Signal Conditioners measure and display load, force and weight from signals generated by strain gauge transducers.

TECHNICAL CHARACTERISTICS

INPUT CHARACTERISTICS	
Power Supply	
Supply	18...28 VDC / 70 mA
Ripple Voltage	max. 1 Vpp / 50 Hz
Bridge Signal	
Sensitivity Ranges	0.5 mV/V to 1.5 mV/V 1.5 mV/V to 4.0 mV/V
Sensitivity (default)	1 mV/V
Input-resistance Sensor	5 V: 120 Ω to 10 kΩ 10 V: 330 Ω to 10 kΩ
Bridge Supply Voltage	5 VDC or 10 VDC (selectable)
OUTPUT CHARACTERISTICS	
Voltage Output	0–10 V @ R _{load} 3 kΩ
Current Output	0/4–20 mA @ R _{load} 0 to 800 Ω
Calibration Signal	100% (10 V or 20 mA) ± 0.8%

TRANSFER CHARACTERISTICS	
Adjustment Sensitivity	Adjustment using 10-turn potentiometer
Zero Coarse Adjustment Range	±75%, in 5 ranges with switches
Zero Fine Adjustment	Adjustment using 10-turn potentiometer
Zero Adjustment Range	±10 mV
Zero Drift vs. Temperature	< 0.01% /°C
Linearity Error	< 0.05 %
Noise	max. 20 mVpp (0...5kHz)
Frequency Response	0 Hz to 3 kHz (-3 dB)
F.R. with selectable low-pass filter	0 Hz to 500 Hz (-3 dB)
ENVIRONMENTAL CHARACTERISTICS	
Operating Temperature	-20 °C to +60 °C
Protection Class	IP 52: Polycarbonate housing IP 65: Aluminum housing
EMC	According to EN 61000-4
MECHANICAL CHARACTERISTICS	
Housing Material	PC-F, UL94 V-0 polycarbonate or aluminum

DIMENSIONS

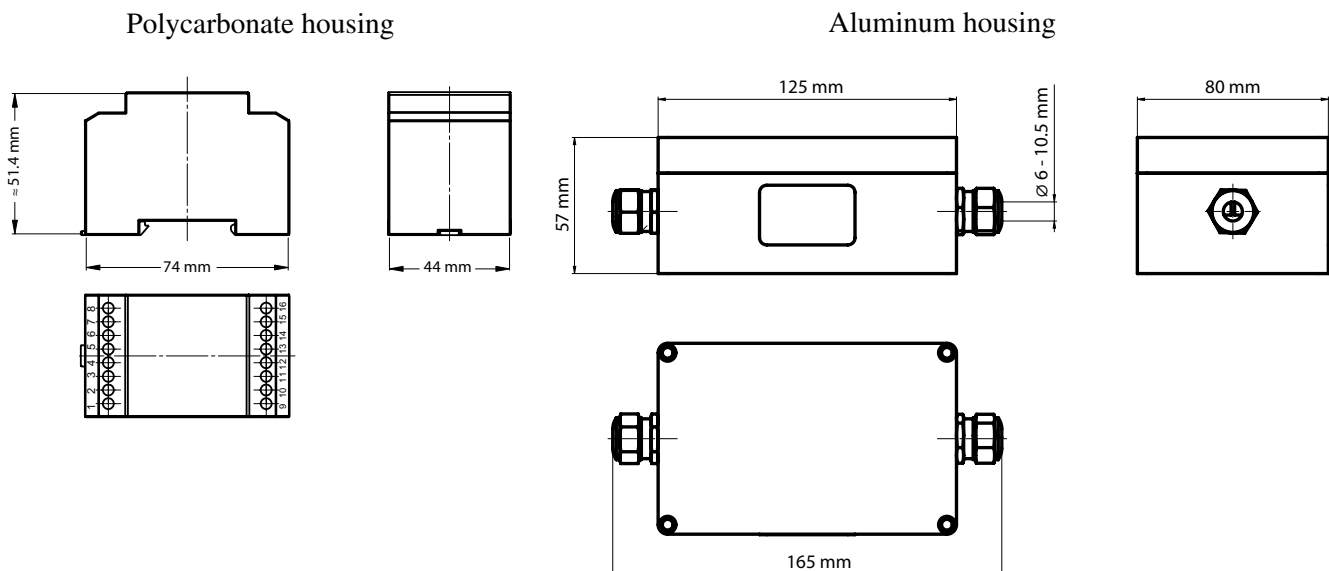

Due to the continual development of our products, we reserve the right to modify specifications without forewarning.



www.magtrol.com

MAGTROL INC
70 Gardenville Parkway
Buffalo, New York 14224 USA
Phone: +1 716 668 5555
Fax: +1 716 668 8705
E-mail: magtrol@magtrol.com

MAGTROL SA
Route de Montena 77
1728 Rossens/Fribourg, Switzerland
Phone: +41 (0)26 407 3000
Fax: +41 (0)26 407 3001
E-mail: magtrol@magtrol.ch

Subsidiaries in:
Germany • France
China • India
Worldwide Network
of Sales Agents

